


OFFICIAL QUOTE

225KVA 575 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



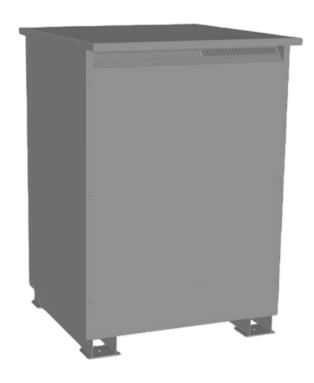

225KVA 575 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER


\$10,880.50 CAD


Three Phase Autotransformer with a capacity of 225kVA, transforming 575Y Volts to 208Y Volts

SKU: RA225J1-B

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 225kVA, transforming 575Y Volts to 208Y Volts



OFFICIAL QUOTE



225KVA 575 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	1018 lbs
Phases	<u>3</u>
kVA	225
Connection	3PhA-NT-1
Primary Voltage	<u>575</u>
Primary Max Current	<u>225.9A</u>
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	600MCM-2
Secondary Voltage	208
Secondary Max Current	<u>624.5A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 - 4.5%</u>
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-8</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

225KVA 575 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------