


OFFICIAL QUOTE

150KVA 380 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER



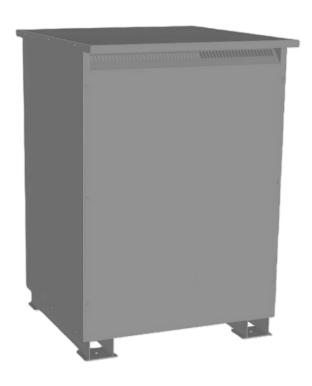

150KVA 380 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER


\$13,130.60 CAD

Three Phase Autotransformer with a capacity of 150kVA, transforming 380Y Volts to 110Y Volts

SKU: RC150F-A2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 150kVA, transforming 380Y Volts to 110Y Volts



OFFICIAL QUOTE



150KVA 380 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 964 lbs |
| Phases | <u>3</u> |
| kVA | <u>150</u> |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 380 |
| Primary Max Current | 227.9A |
| Primary Markings | <u>H1-H2-H3</u> |
| Primary Terminals | 600MCM-2 |
| Secondary Voltage | 110 |
| Secondary Max Current | 787.3A |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>Pads</u> |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 2.5 - 4.5% |
| Sound (db) | <u>55</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-8 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

150KVA 380 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|