


OFFICIAL QUOTE

2500KVA 575 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



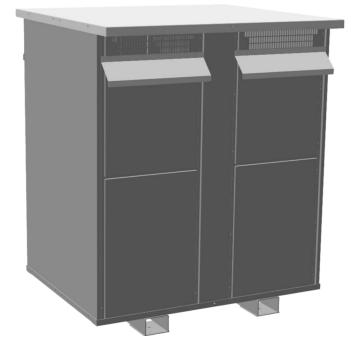


2500KVA 575 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER


\$32,313.60 CAD

Three Phase Autotransformer with a capacity of 2500kVA, transforming 575Y Volts to 440Y Volts

SKU: RA2500J1-H2 Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 2500kVA, transforming 575Y Volts to 440Y Volts



OFFICIAL QUOTE

2500KVA 575 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	3945 lbs
Phases	<u>3</u>
kVA	2500
Connection	<u>3PhA-NT-1</u>
Primary Voltage	<u>575</u>
Primary Max Current	<u>2510.2A</u>
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	Pads
Secondary Voltage	<u>440</u>
Secondary Max Current	<u>3280.4A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	<u>220°C (Class H)</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	<u>N/A</u>
Impedance Range	<u>1.0 – 3.0%</u>
Sound (db)	<u>62</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-11</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered

The quote is valid 30 days from 12 June 2025. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



OFFICIAL QUOTE

2500KVA 575 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM