




**RS200G**

**\$2,854.00 CAD**

SKU: 59b67a1ff018

Categories: [Motor Starters](#)

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

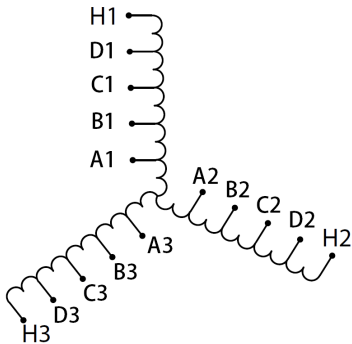

#### PRODUCT SPECIFICATIONS

|                     |                             |
|---------------------|-----------------------------|
| Weight              | 220 lbs                     |
| Phases              | <a href="#">3</a>           |
| HP                  | <a href="#">200</a>         |
| Connection          | <a href="#">3PhA-ST-0-3</a> |
| Primary Voltage     | <a href="#">416</a>         |
| Primary Max Current | <a href="#">277.6A</a>      |



|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Primary Markings           | <a href="#">H1-H2-H3</a>                                                                             |
| Primary Terminals          | <a href="#">Pads</a>                                                                                 |
| Secondary Voltage          | <a href="#">50/65/80/100%</a>                                                                        |
| Secondary Max Current      | <a href="#">2309.4A</a>                                                                              |
| Secondary Markings         | <a href="#">A-B-C-D</a>                                                                              |
| Secondary Terminals        | <a href="#">Pads</a>                                                                                 |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Temperatue Rise            | <a href="#">150°C</a>                                                                                |
| Insuation Class            | <a href="#">220°C</a>                                                                                |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency                 | <a href="#">N/A</a>                                                                                  |
| Impedance                  | <a href="#">N/A</a>                                                                                  |
| Sound (db)                 | <a href="#">N/A</a>                                                                                  |
| Enclosure Type             | <a href="#">Core &amp; Coil</a>                                                                      |
| Enclosure                  | <a href="#">N/A</a>                                                                                  |
| Finish                     | <a href="#">N/A</a>                                                                                  |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |