


OFFICIAL QUOTE

225KVA 460 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER



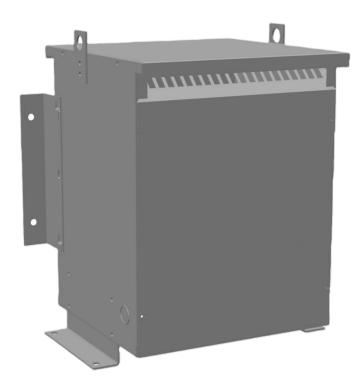

225KVA 460 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$1,967.60 CAD


Single Phase Autotransformer with a capacity of 225kVA, transforming 460 Volts to 480 Volts

SKU: MC225H1-H

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 225kVA, transforming 460 Volts to 480 Volts



OFFICIAL QUOTE

225KVA 460 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 147.1 lbs |
| Phases | 1 |
| kVA | 225 |
| Connection | 1PhA-NT-1 |
| Primary Voltage | 460 |
| Primary Max Current | 282.4A |
| Primary Markings | <u>X0-X1</u> |
| Primary Terminals | <u>Pads</u> |
| Secondary Voltage | 480 |
| Secondary Max Current | 270.6A |
| Secondary Markings | <u>H0-H1</u> |
| Secondary Terminals | 600MCM-2 |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 0.5 - 1.5% |
| Sound (db) | 45 dB |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-4</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

225KVA 460 VOLTS TO 480 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|