


#### **OFFICIAL QUOTE**

### 2000KVA 400 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



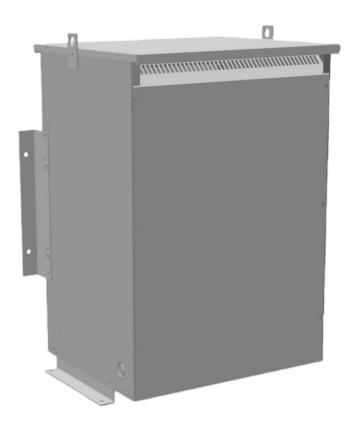

### 2000KVA 400 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER

\$10,009.20 CAD


Three Phase Autotransformer with a capacity of 2000kVA, transforming 400Y Volts to 415Y Volts

**SKU:** RA2000G1-G2

**Categories:** Autotransformer

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 2000kVA, transforming 400Y Volts to 415Y Volts



#### **OFFICIAL QUOTE**



## 2000KVA 400 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 462 lbs  |
| Phases                     | <u>3</u>   |
| kVA                        | 2000   |
| Connection                 | 3PhA-NT-1  |
| Primary Voltage            | 400  |
| Primary Max Current        | 2886.8A  |
| Primary Markings           | <u>X1-X2-X3</u>  |
| Primary Terminals          | <u>Pads</u>  |
| Secondary Voltage          | 415  |
| Secondary Max Current      | 2782.4A  |
| Secondary Markings         | <u>H1-H2-H3</u>  |
| Secondary Terminals        | <u>Pads</u>  |
| Primary Taps               | N/A  |
| Conductor Material         | Aluminum   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 0.5 - 1.5%   |
| Sound (db)                 | <u>55</u>  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | <u>E3R-7</u>   |
| Finish/Colour              | Polyester Powder Coat – ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



#### **OFFICIAL QUOTE**

# 2000KVA 400 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|