



OFFICIAL QUOTE

2500KVA 460 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



2500KVA 460 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER


\$39,741.20 CAD

Three Phase Autotransformer with a capacity of 2500kVA, transforming 460Y Volts to 575Y Volts

SKU: RA2500H1-J1

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

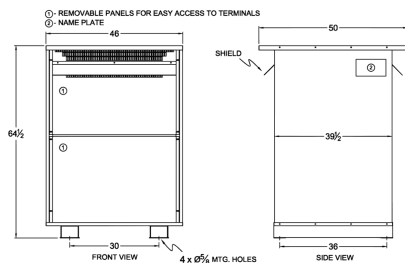

Three Phase Autotransformer with a capacity of 2500kVA, transforming 460Y Volts to 575Y Volts



OFFICIAL QUOTE

2500KVA 460 VOLTS TO 575 VOLTS
THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	3281 lbs
Phases	3
kVA	2500
Connection	3PhA-NT-1
Primary Voltage	460
Primary Max Current	3137.8A
Primary Markings	X1-X2-X3
Primary Terminals	Pads
Secondary Voltage	575
Secondary Max Current	2510.2A
Secondary Markings	H1-H2-H3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-10
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**2500KVA 460 VOLTS TO 575 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer	Canada/RPM
-----------------------------	----------------------------