


#### **OFFICIAL QUOTE**

### 30VA 480 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER



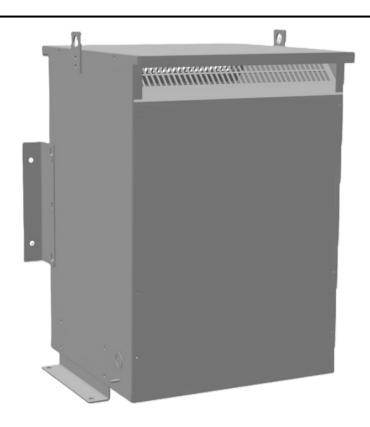

### 30VA 480 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$4,076.96 CAD

Three Phase Isolation Transformer with a capacity of 30kVA, transforming 480 Volts to 415Y/240 Volts

**SKU:** BA30H-N2/Z3

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Isolation Transformer with a capacity of 30kVA, transforming 480 Volts to 415Y/240 Volts



#### **OFFICIAL QUOTE**



# 30VA 480 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	298 lbs
Phases	<u>3</u>
kVA	30
Connection	3Ph-DY-5T-SD
Primary Voltage	480
Primary Max Current	36.08A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	415Y/240
Secondary Max Current	41.74A
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 2 x 2.5%
Conductor Material	<u>Aluminum</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.23% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



#### **OFFICIAL QUOTE**



# 30VA 480 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey