


OFFICIAL QUOTE

37.5KVA 575 VOLTS TO 550 VOLTS SINGLE PHASE AUTOTRANSFORMER



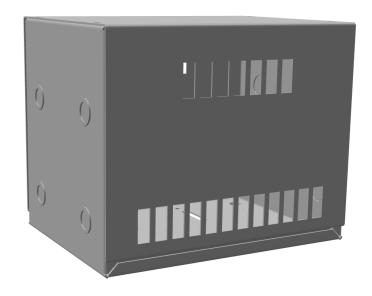

37.5KVA 575 VOLTS TO 550 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$830.20 CAD


Single Phase Autotransformer with a capacity of 37.5kVA, transforming 575 Volts to 550 Volts

SKU: MC37J1-J2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 37.5kVA, transforming 575 Volts to 550 Volts



OFFICIAL QUOTE

37.5KVA 575 VOLTS TO 550 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Wataka	(0.7 lb.
Weight	63.7 lbs
Phases	1
kVA	<u>37.5</u>
Connection	<u>1PhA-NT-1</u>
Primary Voltage	<u>575</u>
Primary Max Current	37.7A
Primary Markings	<u>H0-H1</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	550
Secondary Max Current	39.4A
Secondary Markings	<u>X0-X1</u>
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	180°C (Class F)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	40 dB
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-0</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

37.5KVA 575 VOLTS TO 550 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------