


OFFICIAL QUOTE

225KVA 347 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



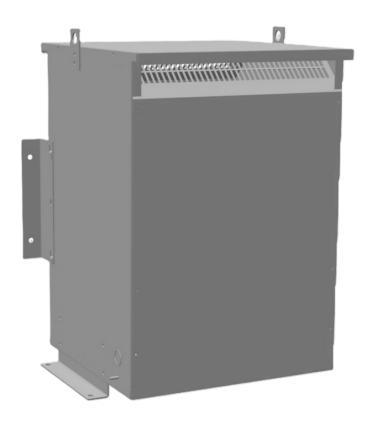

225KVA 347 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER


\$4,937.20 CAD


Three Phase Autotransformer with a capacity of 225kVA, transforming 347Y Volts to 416Y Volts

SKU: RC225E-G

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 225kVA, transforming 347Y Volts to 416Y Volts



OFFICIAL QUOTE





PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	289 lbs
Phases	<u>3</u>
kVA	225
Connection	<u>3PhA-NT-1</u>
Primary Voltage	347
Primary Max Current	<u>374.4A</u>
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	416
Secondary Max Current	312.3A
Secondary Markings	H1-H2-H3
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 - 1.5%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

225KVA 347 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------