


OFFICIAL QUOTE

300KVA 440 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



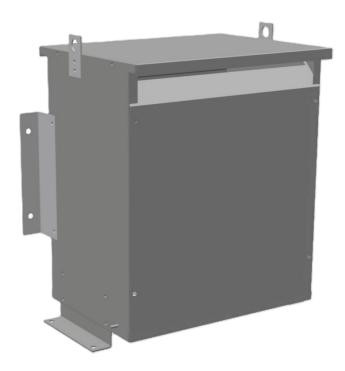

300KVA 440 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,997.30 CAD

Three Phase Autotransformer with a capacity of 300kVA, transforming 440Y Volts to 416Y Volts

SKU: RA300H2-G

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 300kVA, transforming 440Y Volts to 416Y Volts



OFFICIAL QUOTE

300KVA 440 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	101 lbs
Phases	<u>3</u>
kVA	300
Connection	3PhA-NT-1
Primary Voltage	440
Primary Max Current	393.6A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	416
Secondary Max Current	416.4A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 - 1.5%
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-5</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

300KVA 440 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------