




OFFICIAL QUOTE

15KVA 200 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER

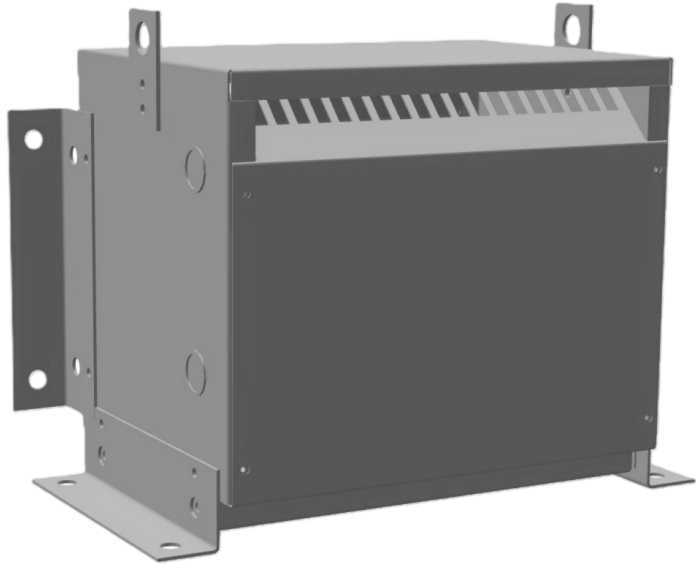

15KVA 200 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



\$2,218.70 CAD

Three Phase Autotransformer with a capacity of
15kVA, transforming 200Y Volts to 575Y Volts

SKU: RC15B1-J1

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

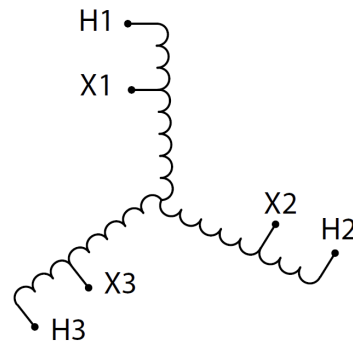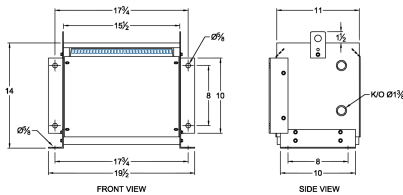

Three Phase Autotransformer with a capacity of 15kVA, transforming 200Y Volts to 575Y Volts



OFFICIAL QUOTE

15KVA 200 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	75 lbs
Phases	3
kVA	15
Connection	3PhA-NT-1
Primary Voltage	200
Primary Max Current	43.3A
Primary Markings	X1-X2-X3
Primary Terminals	#2-14 AWG
Secondary Voltage	575
Secondary Max Current	15.1A
Secondary Markings	H1-H2-H3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 – 4.5%
Sound (db)	45
Enclosure Type	NEMA 1
Enclosure Size	E1-3
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

15KVA 200 VOLTS TO 575 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------