




**225KVA 230 VOLTS TO 347 VOLTS  
THREE PHASE AUTOTRANSFORMER**

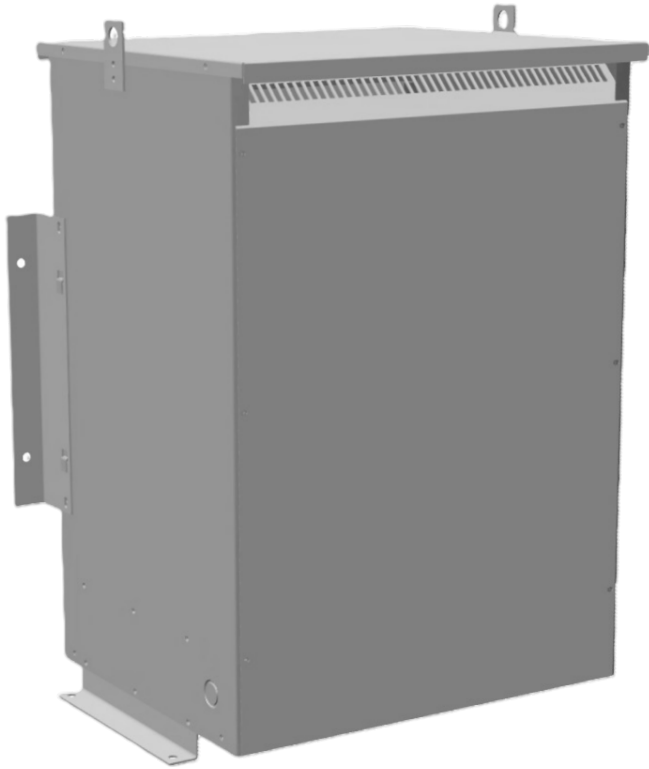

**225KVA 230 VOLTS TO 347  
VOLTS THREE PHASE  
AUTOTRANSFORMER**


**\$6,883.42 USD**

Three Phase Autotransformer with a capacity of 225kVA, transforming 230Y Volts to 347Y Volts

**SKU:** RC225C1-E

**Categories:** Autotransformer

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

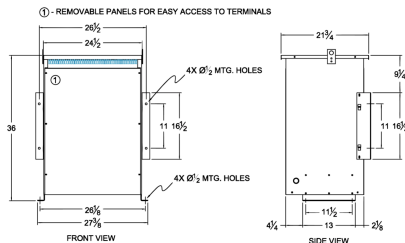

Three Phase Autotransformer with a capacity of 225kVA, transforming 230Y Volts to 347Y Volts



## OFFICIAL QUOTE

225KVA 230 VOLTS TO 347 VOLTS  
THREE PHASE AUTOTRANSFORMER

## PRODUCT SPECIFICATIONS

Weight	652 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">225</a>
Connection	<a href="#">3PhA-NT-1</a>
Primary Voltage	<a href="#">230</a>
Primary Max Current	<a href="#">564.8A</a>
Primary Markings	<a href="#">X1-X2-X3</a>
Primary Terminals	<a href="#">Pads</a>
Secondary Voltage	<a href="#">347</a>
Secondary Max Current	<a href="#">374.4A</a>
Secondary Markings	<a href="#">H1-H2-H3</a>
Secondary Terminals	<a href="#">Pads</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Insulation Class	<a href="#">220°C (Class H)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">1.0 – 3.0%</a>
Sound (db)	<a href="#">55</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure Size	<a href="#">E3R-7</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

225KVA 230 VOLTS TO 347 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)