


OFFICIAL QUOTE

450KVA 440 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



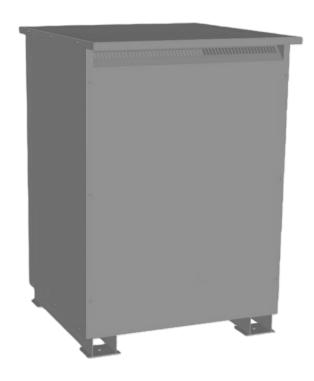

450KVA 440 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER


\$19,085.50 CAD

Three Phase Autotransformer with a capacity of 450kVA, transforming 440Y Volts to 277Y Volts

SKU: RC450H2-D

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 450kVA, transforming 440Y Volts to 277Y Volts



OFFICIAL QUOTE



450KVA 440 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	1465 lbs
Phases	<u>3</u>
kVA	<u>450</u>
Connection	3PhA-NT-1
Primary Voltage	440
Primary Max Current	<u>590.5A</u>
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	277
Secondary Max Current	<u>937.9A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 - 3.0%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-8</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

450KVA 440 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------