


OFFICIAL QUOTE

50KVA 415 VOLTS TO 550 VOLTS SINGLE PHASE AUTOTRANSFORMER



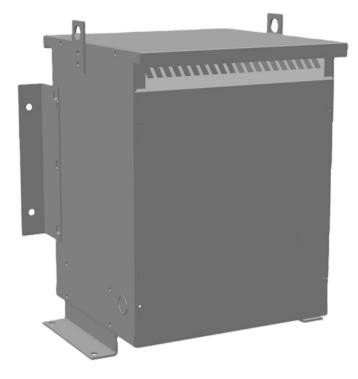

50KVA 415 VOLTS TO 550 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$1,701.63 USD

Single Phase Autotransformer with a capacity of 50kVA, transforming 415 Volts to 550 Volts

SKU: MC50G2-J2 Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



| H0 / X0 | X1 | H1 |
|---------|----|----|

Single Phase Autotransformer with a capacity of 50kVA, transforming 415 Volts to 550 Volts



OFFICIAL QUOTE

50KVA 415 VOLTS TO 550 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 141.5 lbs | |
|----------------------------|---|--|
| Phases | 1 | |
| kVA | <u>50</u> | |
| Connection | <u>1PhA-NT-1</u> | |
| Primary Voltage | <u>415</u> | |
| Primary Max Current | <u>69.6A</u> | |
| Primary Markings | <u>X0-X1</u> | |
| Primary Terminals | <u>#2-14 AWG</u> | |
| Secondary Voltage | <u>550</u> | |
| Secondary Max Current | <u>52.5A</u> | |
| Secondary Markings | <u>H0-H1</u> | |
| Secondary Terminals | <u>#2-14 AWG</u> | |
| Primary Taps | N/A | |
| Conductor Material | <u>Copper</u> | |
| Insulation Class | <u>220°C (Class H)</u> | |
| BIL (Insulation) Level | <u>10kV</u> | |
| Efficiency (@35% Load) % | <u>N/A</u> | |
| Impedance Range | <u>1.0 – 3.0%</u> | |
| Sound (db) | <u>45 dB</u> | |
| Enclosure Type | NEMA 3R Indoor | |
| Enclosure Size | <u>E3R-4</u> | |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey | |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered | |

The quote is valid 30 days from 8 June 2025. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



OFFICIAL QUOTE

50KVA 415 VOLTS TO 550 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM