


OFFICIAL QUOTE

6KVA 460 VOLTS TO 416Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER



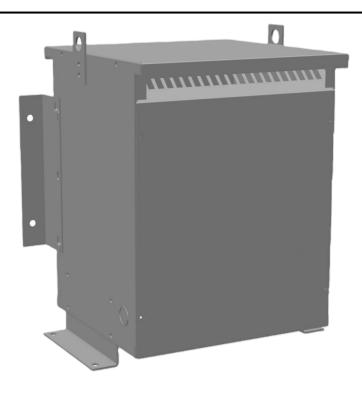

6KVA 460 VOLTS TO 416Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

\$1,833.31 CAD


Three Phase Isolation Transformer with a capacity of 6kVA, transforming 460 Volts to 416Y/240 Volts

SKU: BC6H1-N

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 6kVA, transforming 460 Volts to 416Y/240 Volts



OFFICIAL QUOTE



6KVA 460 VOLTS TO 416Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	116 lbs
Phases	<u>3</u>
kVA	<u>6</u>
Connection	3Ph-DY-3T-SD
Primary Voltage	460
Primary Max Current	7.53A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	<u>416Y/240</u>
Secondary Max Current	8.33A
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	<u>+/- 1 x 5%</u>
Conductor Material	<u>Copper</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 - 7.0%
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-4</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



6KVA 460 VOLTS TO 416Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey