




OFFICIAL QUOTE

75KVA 575 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER

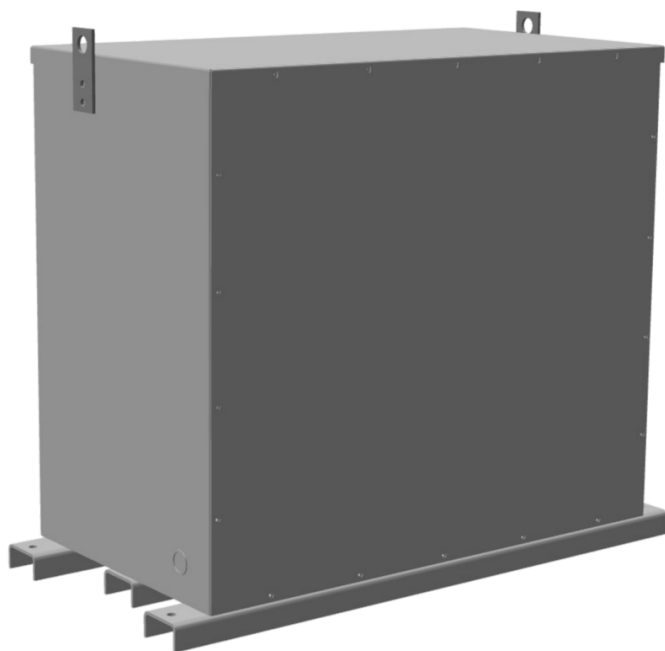

75KVA 575 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



\$9,698.00 CAD

Three Phase Encapsulated Isolation Transformer with a capacity of 75kVA, transforming 575 Volts to 208Y/120 Volts

SKU: BA75J1-M/EP

Categories: [Encapsulated Isolation Transformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

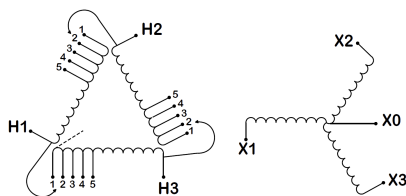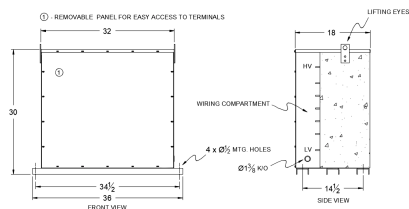

Three Phase Encapsulated Isolation Transformer with a capacity of 75kVA, transforming 575 Volts to 208Y/120 Volts



OFFICIAL QUOTE

75KVA 575 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	1300 lbs
Phases	3
kVA	75
Connection	3Ph-DY-5T-SD
Primary Voltage	575
Primary Max Current	721.7A
Primary Markings	H1-H2-3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	208Y/120
Secondary Max Current	208.2A
Secondary Markings	X0-X1-X2-X3
Secondary Terminals	600MCM-2
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 – 3.5%
Sound (db)	50
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-3PEP-7
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Country/Manufacturer	Canada/RPM