


OFFICIAL QUOTE

2500KVA 200 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER



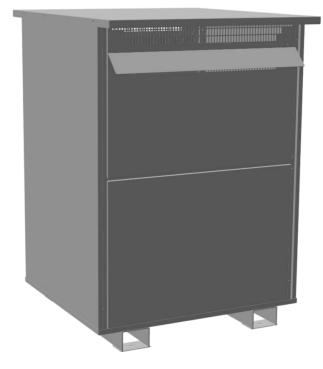


2500KVA 200 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER

\$34,557.60 CAD

Three Phase Autotransformer with a capacity of 2500kVA, transforming 200Y Volts to 240Y Volts

SKU: RA2500B1-C Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 2500kVA, transforming 200Y Volts to 240Y Volts



OFFICIAL QUOTE

2500KVA 200 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 2660 lbs |
|----------------------------|---|
| Phases | <u>3</u> |
| kVA | 2500 |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | 200 |
| Primary Max Current | <u>7216.9A</u> |
| Primary Markings | <u>X1-X2-X3</u> |
| Primary Terminals | Pads |
| Secondary Voltage | 240 |
| Secondary Max Current | <u>6014.1A</u> |
| Secondary Markings | <u>H1-H2-H3</u> |
| Secondary Terminals | Pads |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| Insulation Class | <u>220°C (Class H)</u> |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | <u>N/A</u> |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | <u>60</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-10</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |

The quote is valid 30 days from 17 June 2025. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



OFFICIAL QUOTE

2500KVA 200 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM