


**OFFICIAL QUOTE** 

22.5KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE BOLT-ON BREAKER MINI POWER CENTER



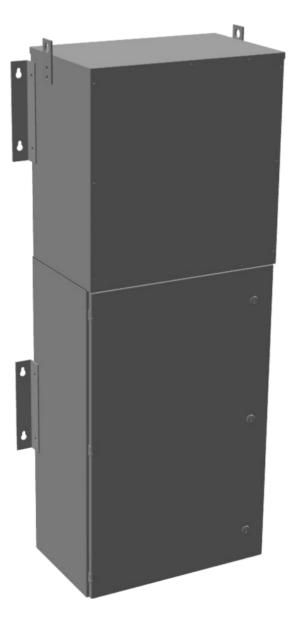



# 22.5KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE BOLT-ON BREAKER MINI POWER CENTER

\$13,154.00 CAD

SKU: MP3A22H-M/BO/CLC Categories: <u>Mini Power Centers</u>

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





The quote is valid 30 days from 25 May 2025. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



**OFFICIAL QUOTE** 

## 22.5KVA 480 VOLTS TO 208Y/120 **VOLTS THREE PHASE BOLT-ON BREAKER MINI POWER CENTER**



### **PRODUCT SPECIFICATIONS**

Weight	630 lbs
Phases	<u>3</u>
kVA	22.5
Connection	MPC3P-5t
Primary Taps	<u>+/- 2 x 2.5%</u>
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Impedance Range	<u>1.5 – 3.0%</u>
Enclosure Type	NEMA 3R Outdoor
Enclosure Size	E3R-1PMPC-3B
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered
Incoming Voltage	<u>480</u>
Primary Breaker	<u>60A</u>
Interruping Rating	<u>14kAIC @ 480V</u>
Output Voltage	<u>208Y/120</u>
Secondary Breaker	<u>70A</u>
Short Circuit Withstand	<u>10kAIC @ 240V</u>
Panel Board	Bolt-On
Load Center Bus Material	<u>Copper</u>
# of Circuits	<u>30</u>
Circuit Breaker Suitability	Eaton Type BAB
Temperatue Rise	<u>130°C</u>

The quote is valid 30 days from 25 May 2025. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



**OFFICIAL QUOTE** 

## 22.5KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE BOLT-ON BREAKER MINI POWER CENTER



Insuation Class	200°C (Class N)
Country/Manufacturer	Canada/RPM