


OFFICIAL QUOTE

BC15J-M/Z3



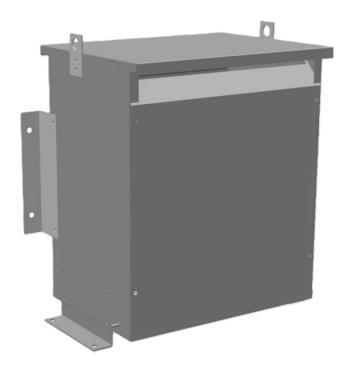


BC15J-M/Z3


\$3,618.00 CAD

SKU: f8921e5cf671

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

| Weight | 225 lbs |
|---------------------|---------------------|
| Phases | 3 |
| kVA | <u>15</u> |
| Connection | <u>3Ph-DY-5T-SD</u> |
| Primary Voltage | 600 |
| Primary Max Current | <u>14.4A</u> |



OFFICIAL QUOTE BC15J-M/Z3



| Primary Markings | <u>H1-H2-H3</u> |
|----------------------------|--|
| Primary Terminals | #2-14 AWG |
| Secondary Voltage | <u>208Y/120</u> |
| Secondary Max Current | 41.6A |
| Secondary Markings | <u>X0-X1-X2-X3</u> |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | <u>+/- 2 x 2.5%</u> |
| Conductor Material | <u>Copper</u> |
| Insuation Class | 220°C |
| BIL (Insulation) Level | 10kV |
| Impedance | 4.0 - 6.0% |
| Sound (db) | 45 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | <u>E3R-5</u> |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |