




OFFICIAL QUOTE

112KVA 347 VOLTS TO 440 VOLTS
THREE PHASE AUTOTRANSFORMER

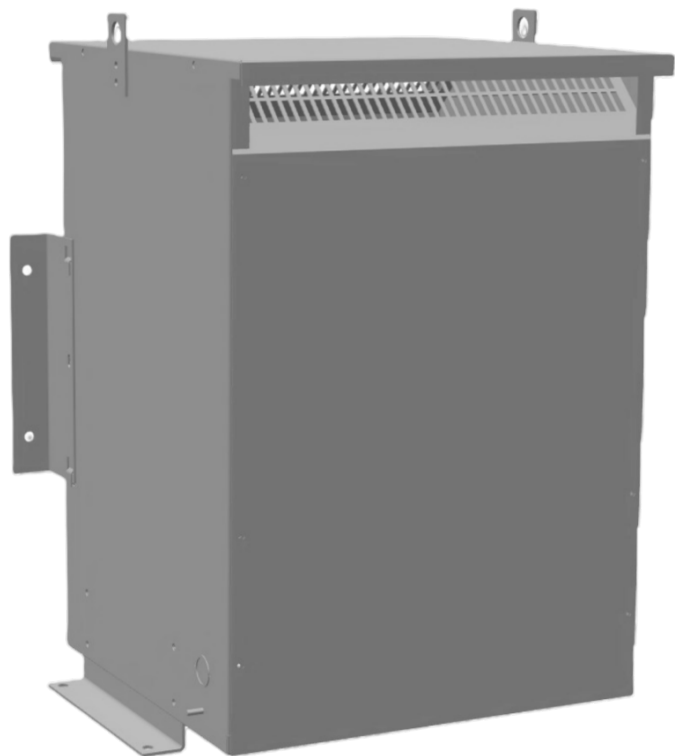

112KVA 347 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



\$3,719.60 CAD

Three Phase Autotransformer with a capacity of 112.5kVA, transforming 347Y Volts to 440Y Volts

SKU: RC112E-H2

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

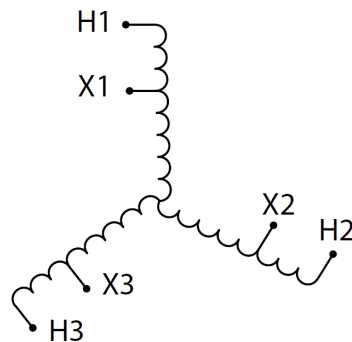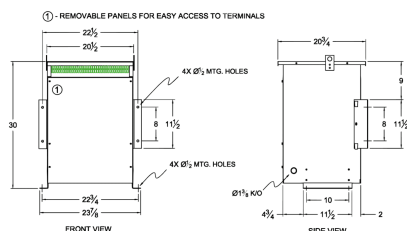

Three Phase Autotransformer with a capacity of 112.5kVA, transforming 347Y Volts to 440Y Volts



OFFICIAL QUOTE

112KVA 347 VOLTS TO 440 VOLTS
THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	205 lbs
Phases	3
kVA	112.5
Connection	3PhA-NT-1
Primary Voltage	347
Primary Max Current	187.2A
Primary Markings	X1-X2-X3
Primary Terminals	600MCM-2
Secondary Voltage	440
Secondary Max Current	147.6A
Secondary Markings	H1-H2-H3
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**112KVA 347 VOLTS TO 440 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer	Canada/RPM
-----------------------------	----------------------------