



OFFICIAL QUOTE

1500KVA 200 VOLTS TO 347 VOLTS  
THREE PHASE AUTOTRANSFORMER



1500KVA 200 VOLTS TO  
347 VOLTS THREE PHASE  
AUTOTRANSFORMER



**\$77,417.00 CAD**

Three Phase Autotransformer with a capacity of 1500kVA, transforming 200Y Volts to 347Y Volts

SKU: RC1500B1-E

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

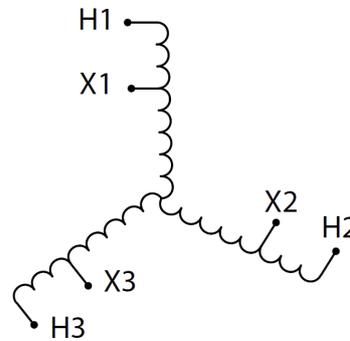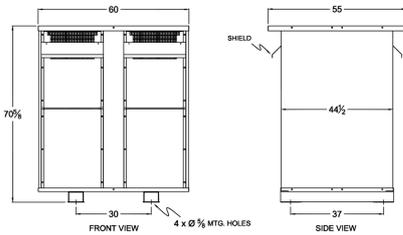

Three Phase Autotransformer with a capacity of 1500kVA, transforming 200Y Volts to 347Y Volts



## OFFICIAL QUOTE

**1500KVA 200 VOLTS TO 347 VOLTS  
THREE PHASE AUTOTRANSFORMER**



### PRODUCT SPECIFICATIONS

<b>Weight</b>	5762 lbs
<b>Phases</b>	<a href="#">3</a>
<b>kVA</b>	<a href="#">1500</a>
<b>Connection</b>	<a href="#">3PhA-NT-1</a>
<b>Primary Voltage</b>	<a href="#">200</a>
<b>Primary Max Current</b>	<a href="#">4330.1A</a>
<b>Primary Markings</b>	<a href="#">X1-X2-X3</a>
<b>Primary Terminals</b>	<a href="#">Pads</a>
<b>Secondary Voltage</b>	<a href="#">347</a>
<b>Secondary Max Current</b>	<a href="#">2495.8A</a>
<b>Secondary Markings</b>	<a href="#">H1-H2-H3</a>
<b>Secondary Terminals</b>	<a href="#">Pads</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Insulation Class</b>	<a href="#">220°C (Class H)</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">1.5 – 3.5%</a>
<b>Sound (db)</b>	<a href="#">62</a>
<b>Enclosure Type</b>	<a href="#">NEMA 3R Indoor</a>
<b>Enclosure Size</b>	<a href="#">E3R-11</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

1500KVA 200 VOLTS TO 347 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)