




OFFICIAL QUOTE

150KVA 347 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER

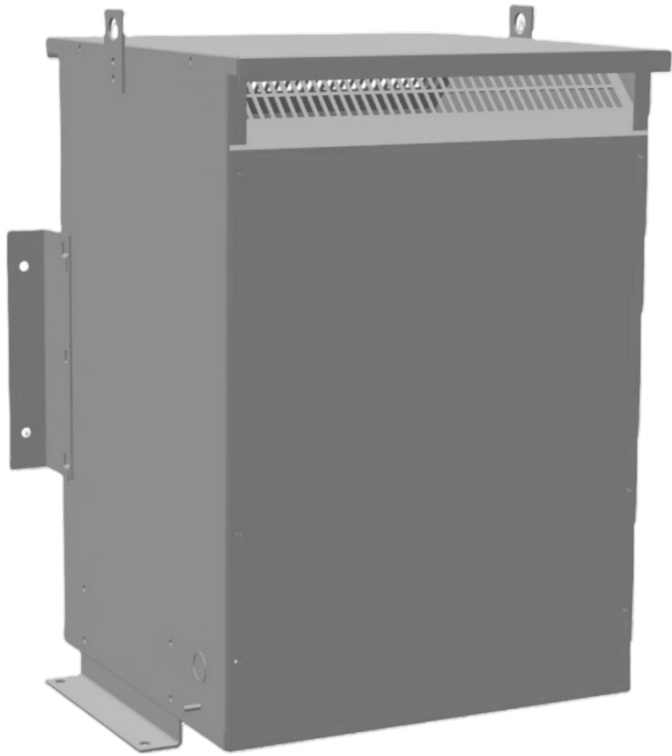

150KVA 347 VOLTS TO 277 VOLTS SINGLE PHASE AUTOTRANSFORMER



\$4,247.10 CAD

Single Phase Autotransformer with a capacity of
150kVA, transforming 347 Volts to 277 Volts

SKU: MC150E-D

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

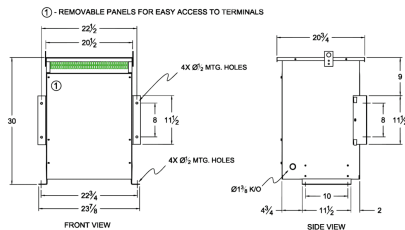

Single Phase Autotransformer with a capacity of 150kVA, transforming 347 Volts to 277 Volts



OFFICIAL QUOTE

150KVA 347 VOLTS TO 277 VOLTS
SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	284.8 lbs
Phases	1
kVA	150
Connection	1PhA-NT-1
Primary Voltage	347
Primary Max Current	249.6A
Primary Markings	H0-H1
Primary Terminals	600MCM-2
Secondary Voltage	277
Secondary Max Current	312.6A
Secondary Markings	X0-X1
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	45 dB
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

150KVA 347 VOLTS TO 277 VOLTS
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)