


OFFICIAL QUOTE

15KVA 115 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



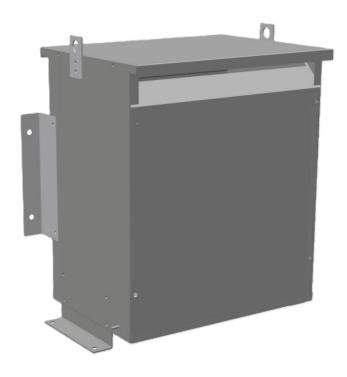

15KVA 115 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,461.60 CAD


Three Phase Autotransformer with a capacity of 15kVA, transforming 115Y Volts to 416Y Volts

SKU: RC15A1-G

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 15kVA, transforming 115Y Volts to 416Y Volts



OFFICIAL QUOTE

15KVA 115 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	84 lbs
Phases	<u>3</u>
kVA	<u>15</u>
Connection	<u>3PhA-NT-1</u>
Primary Voltage	115
Primary Max Current	75.3A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2/0-6 AWG
Secondary Voltage	416
Secondary Max Current	20.8A
Secondary Markings	H1-H2-H3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-5</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

15KVA 115 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------