


#### **OFFICIAL QUOTE**

## 15KVA 200 VOLTS TO 380 VOLTS SINGLE PHASE AUTOTRANSFORMER



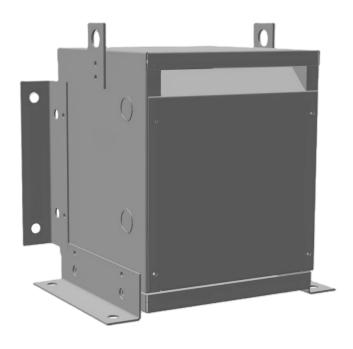

# 15KVA 200 VOLTS TO 380 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$1,755.90 CAD

Single Phase Autotransformer with a capacity of 15kVA, transforming 200 Volts to 380 Volts

SKU: MC15B1-F

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Autotransformer with a capacity of 15kVA, transforming 200 Volts to 380 Volts



### **OFFICIAL QUOTE**



## 15KVA 200 VOLTS TO 380 VOLTS SINGLE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 99.4 lbs   |
| Phases                     | 1  |
| kVA                        | <u>15</u>  |
| Connection                 | 1PhA-NT-1  |
| Primary Voltage            | 200  |
| Primary Max Current        | 43.3A  |
| Primary Markings           | <u>X0-X1</u>   |
| Primary Terminals          | #2-14 AWG  |
| Secondary Voltage          | 380  |
| Secondary Max Current      | 22.8A  |
| Secondary Markings         | <u>H0-H1</u>   |
| Secondary Terminals        | <u>Terminal Blocks</u>   |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | <u>1.5 - 3.5%</u>  |
| Sound (db)                 | 40 dB  |
| Enclosure Type             | NEMA 1   |
| Enclosure Size             | <u>E1-2</u>  |
| Finish/Colour              | Polyester Powder Coat – ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



### **OFFICIAL QUOTE**

## 15KVA 200 VOLTS TO 380 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|