



**15KVA 416 VOLTS TO 347 VOLTS
THREE PHASE AUTOTRANSFORMER**



**15KVA 416 VOLTS TO 347
VOLTS THREE PHASE
AUTOTRANSFORMER**


\$1,513.50 CAD

Three Phase Autotransformer with a capacity of 15kVA, transforming 416Y Volts to 347Y Volts

SKU: RC15G-E

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

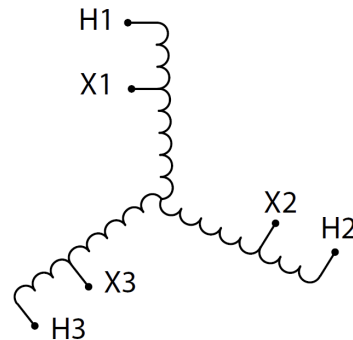

Three Phase Autotransformer with a capacity of 15kVA, transforming 416Y Volts to 347Y Volts



PRODUCT SPECIFICATIONS

| | |
|----------------------------|--|
| Weight | 20 lbs |
| Phases | 3 |
| kVA | 15 |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 416 |
| Primary Max Current | 20.8A |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | Terminal Blocks |
| Secondary Voltage | 347 |
| Secondary Max Current | 25A |
| Secondary Markings | X1-X2-X3 |
| Secondary Terminals | Terminal Blocks |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 180°C (Class F) |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 0.5 – 1.5% |
| Sound (db) | 40 |
| Enclosure Type | NEMA 1 |
| Enclosure Size | E1-1 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE
15KVA 416 VOLTS TO 347 VOLTS
THREE PHASE AUTOTRANSFORMER



| | |
|----------------------|----------------------------|
| Country/Manufacturer | Canada/RPM |
|----------------------|----------------------------|