



15KVA 440 VOLTS TO 115 VOLTS SINGLE PHASE AUTOTRANSFORMER



\$2,181.50 CAD

Single Phase Autotransformer with a capacity of 15kVA, transforming 440 Volts to 115 Volts

SKU: MC15H2-A1

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

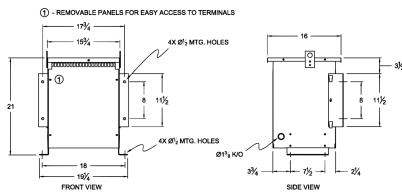

Single Phase Autotransformer with a capacity of 15kVA, transforming 440 Volts to 115 Volts



PRODUCT SPECIFICATIONS

Weight	127.7 lbs
Phases	1
kVA	15
Connection	1PhA-NT-1
Primary Voltage	440
Primary Max Current	19.7A
Primary Markings	H0-H1
Primary Terminals	Terminal Blocks
Secondary Voltage	115
Secondary Max Current	75.3A
Secondary Markings	X0-X1
Secondary Terminals	#2/0-6 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 – 4.5%
Sound (db)	45 dB
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-4
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

15KVA 440 VOLTS TO 115 VOLTS
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------