


OFFICIAL QUOTE

15KVA 440 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



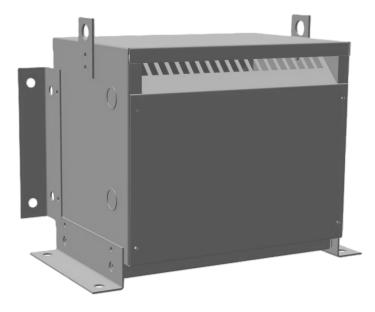

15KVA 440 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER

\$2,445.70 CAD

Three Phase Autotransformer with a capacity of 15kVA, transforming 440Y Volts to 208Y Volts

SKU: RC15H2-B Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 15kVA, transforming 440Y Volts to 208Y Volts



OFFICIAL QUOTE

15KVA 440 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	58 lbs
Phases	3
kVA	<u>15</u>
Connection	<u>3PhA-NT-1</u>
Primary Voltage	<u>440</u>
Primary Max Current	<u>19.7A</u>
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	Terminal Blocks
Secondary Voltage	<u>208</u>
Secondary Max Current	<u>41.6A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>#2-14 AWG</u>
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	<u>220°C (Class H)</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	<u>N/A</u>
Impedance Range	<u>1.5 – 3.5%</u>
Sound (db)	<u>40</u>
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

15KVA 440 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM