




**15KVA 550 VOLTS TO 416 VOLTS
THREE PHASE AUTOTRANSFORMER**

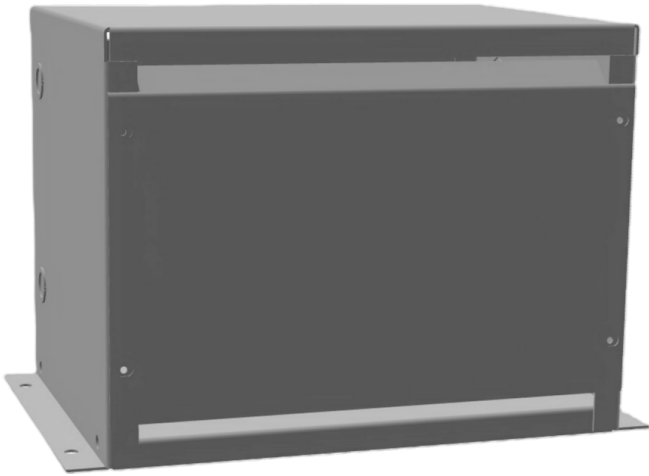

**15KVA 550 VOLTS TO 416
VOLTS THREE PHASE
AUTOTRANSFORMER**



\$1,541.60 CAD

Three Phase Autotransformer with a capacity of 15kVA, transforming 550Y Volts to 416Y Volts

SKU: RC15J2-G

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

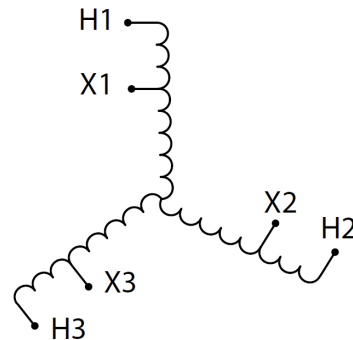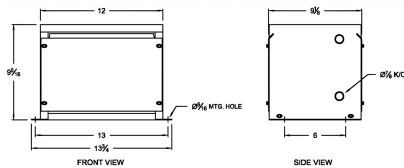

Three Phase Autotransformer with a capacity of 15kVA, transforming 550Y Volts to 416Y Volts



PRODUCT SPECIFICATIONS

Weight	24 lbs
Phases	3
kVA	15
Connection	3PhA-NT-1
Primary Voltage	550
Primary Max Current	15.7A
Primary Markings	H1-H2-H3
Primary Terminals	Terminal Blocks
Secondary Voltage	416
Secondary Max Current	20.8A
Secondary Markings	X1-X2-X3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-1
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE
15KVA 550 VOLTS TO 416 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------