


OFFICIAL QUOTE

2000KVA 400 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



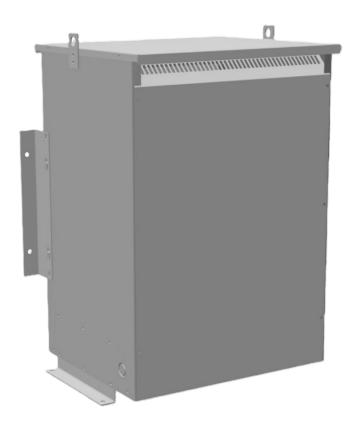

2000KVA 400 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER


\$11,372.30 CAD


Three Phase Autotransformer with a capacity of 2000kVA, transforming 400Y Volts to 416Y Volts

SKU: RC2000G1-G

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 2000kVA, transforming 400Y Volts to 416Y Volts



OFFICIAL QUOTE



2000KVA 400 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	663 lbs
Phases	<u>3</u>
kVA	2000
Connection	3PhA-NT-1
Primary Voltage	400
Primary Max Current	2886.8A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	416
Secondary Max Current	2775.7A
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>0.5 – 1.5%</u>
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

2000KVA 400 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------