




OFFICIAL QUOTE

2000KVA 440 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER

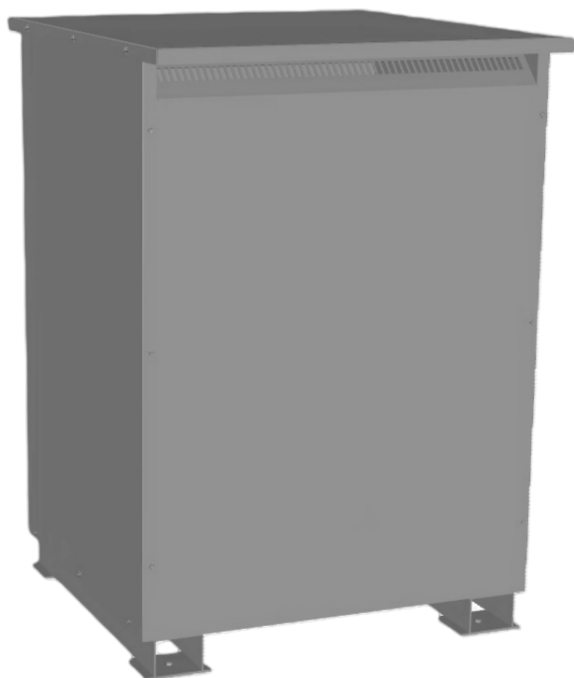

2000KVA 440 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



\$12,397.90 CAD

Three Phase Autotransformer with a capacity of 2000kVA, transforming 440Y Volts to 415Y Volts

SKU: RA2000H2-G2

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

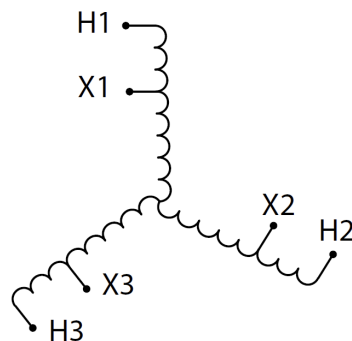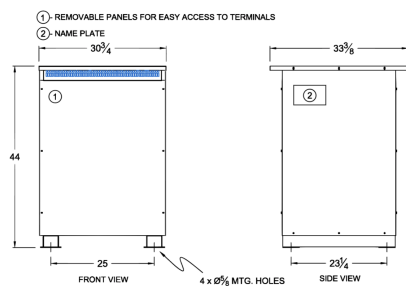

Three Phase Autotransformer with a capacity of 2000kVA, transforming 440Y Volts to 415Y Volts



OFFICIAL QUOTE

2000KVA 440 VOLTS TO 415 VOLTS
THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	778 lbs
Phases	3
kVA	2000
Connection	3PhA-NT-1
Primary Voltage	440
Primary Max Current	2624.3A
Primary Markings	H1-H2-H3
Primary Terminals	Pads
Secondary Voltage	415
Secondary Max Current	2782.4A
Secondary Markings	X1-X2-X3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	55
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**2000KVA 440 VOLTS TO 415 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer	Canada/RPM
-----------------------------	----------------------------