




OFFICIAL QUOTE

2000KVA 440 VOLTS TO 550 VOLTS
THREE PHASE AUTOTRANSFORMER

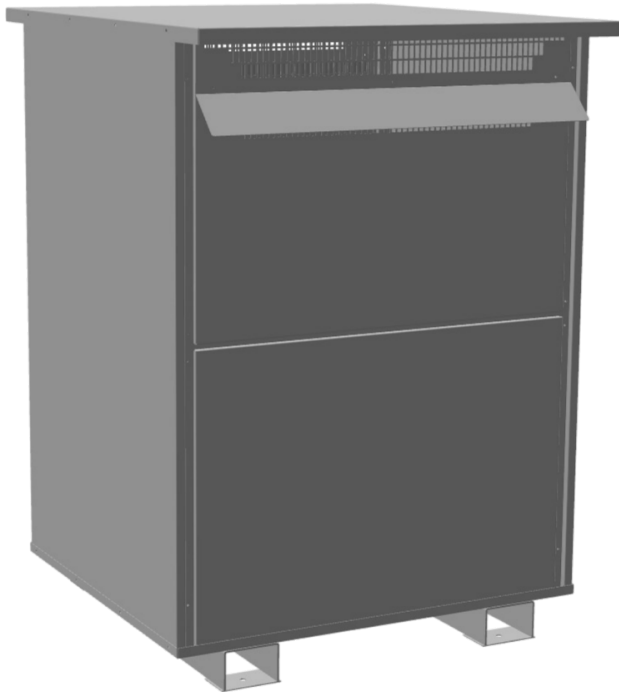

2000KVA 440 VOLTS TO
550 VOLTS THREE PHASE
AUTOTRANSFORMER



\$31,793.00 CAD

Three Phase Autotransformer with a capacity of 2000kVA, transforming 440Y Volts to 550Y Volts

SKU: RA2000H2-J2

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

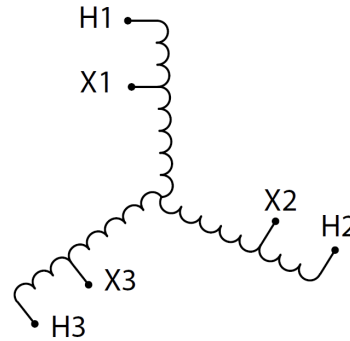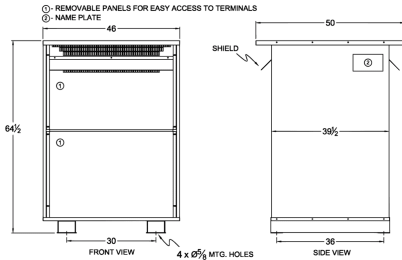

Three Phase Autotransformer with a capacity of 2000kVA, transforming 440Y Volts to 550Y Volts



OFFICIAL QUOTE

2000KVA 440 VOLTS TO 550 VOLTS
THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| | |
|----------------------------|--|
| Weight | 2538 lbs |
| Phases | 3 |
| kVA | 2000 |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 440 |
| Primary Max Current | 2624.3A |
| Primary Markings | X1-X2-X3 |
| Primary Terminals | Pads |
| Secondary Voltage | 550 |
| Secondary Max Current | 2099.5A |
| Secondary Markings | H1-H2-H3 |
| Secondary Terminals | Pads |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 0.5 – 1.5% |
| Sound (db) | 60 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-10 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

2000KVA 440 VOLTS TO 550 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)