



OFFICIAL QUOTE

225KVA 200 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



225KVA 200 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER


\$17,025.40 CAD

Three Phase Autotransformer with a capacity of 225kVA, transforming 200Y Volts to 575Y Volts

SKU: RC225B1-J1

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

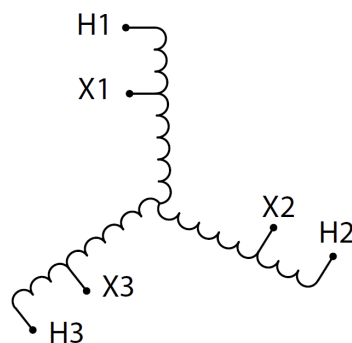

Three Phase Autotransformer with a capacity of 225kVA, transforming 200Y Volts to 575Y Volts



OFFICIAL QUOTE

225KVA 200 VOLTS TO 575 VOLTS
THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	1392 lbs
Phases	3
kVA	225
Connection	3PhA-NT-1
Primary Voltage	200
Primary Max Current	649.5A
Primary Markings	X1-X2-X3
Primary Terminals	Pads
Secondary Voltage	575
Secondary Max Current	225.9A
Secondary Markings	H1-H2-H3
Secondary Terminals	600MCM-2
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 – 4.5%
Sound (db)	55
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**225KVA 200 VOLTS TO 575 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer	Canada/RPM
-----------------------------	----------------------------