



OFFICIAL QUOTE



225KVA 480 VOLTS TO 208 VOLTS
THREE PHASE AUTOTRANSFORMER



225KVA 480 VOLTS TO 208
VOLTS THREE PHASE
AUTOTRANSFORMER



\$14,793.20 CAD

Three Phase Autotransformer with a capacity of 225kVA, transforming 480Y Volts to 208Y Volts

SKU: RC225H-B

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

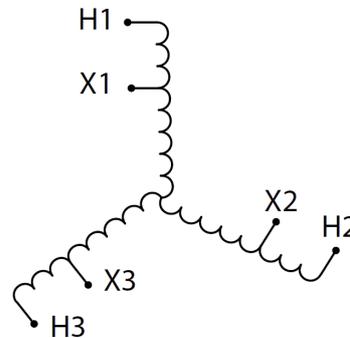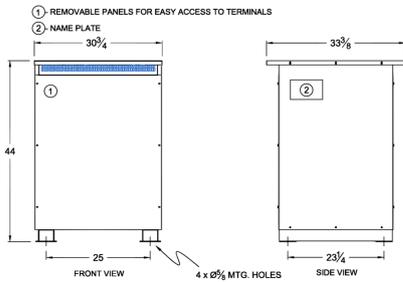

Three Phase Autotransformer with a capacity of 225kVA, transforming 480Y Volts to 208Y Volts



OFFICIAL QUOTE

225KVA 480 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	1184 lbs
Phases	3
kVA	225
Connection	3PhA-NT-1
Primary Voltage	480
Primary Max Current	270.6A
Primary Markings	H1-H2-H3
Primary Terminals	600MCM-2
Secondary Voltage	208
Secondary Max Current	624.5A
Secondary Markings	X1-X2-X3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 – 3.5%
Sound (db)	55
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

225KVA 480 VOLTS TO 208 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)