




OFFICIAL QUOTE

25KVA 440 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER

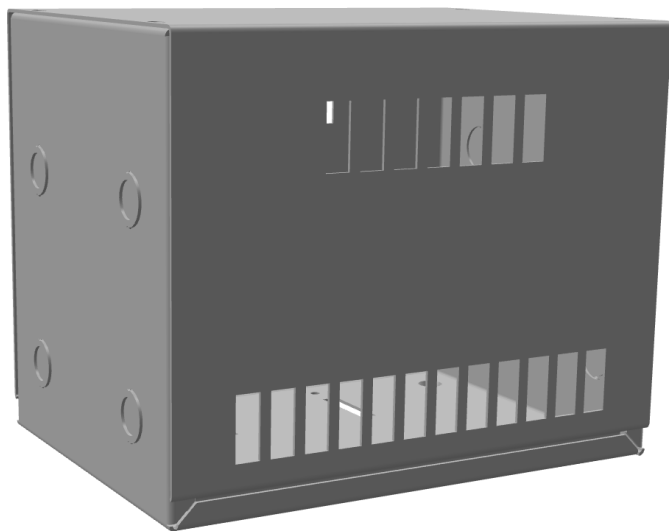

25KVA 440 VOLTS TO 415 VOLTS SINGLE PHASE AUTOTRANSFORMER



\$794.20 CAD

Single Phase Autotransformer with a capacity of 25kVA, transforming 440 Volts to 415 Volts

SKU: MC25H2-G2

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

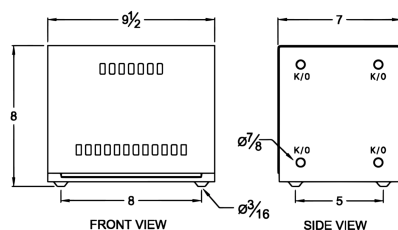

Single Phase Autotransformer with a capacity of 25kVA, transforming 440 Volts to 415 Volts



OFFICIAL QUOTE

25KVA 440 VOLTS TO 415 VOLTS
SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	60.4 lbs
Phases	1
kVA	25
Connection	1PhA-NT-1
Primary Voltage	440
Primary Max Current	32.8A
Primary Markings	H0-H1
Primary Terminals	Terminal Blocks
Secondary Voltage	415
Secondary Max Current	34.8A
Secondary Markings	X0-X1
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	40 dB
Enclosure Type	NEMA 1
Enclosure Size	E1-0
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

25KVA 440 VOLTS TO 415 VOLTS
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)