


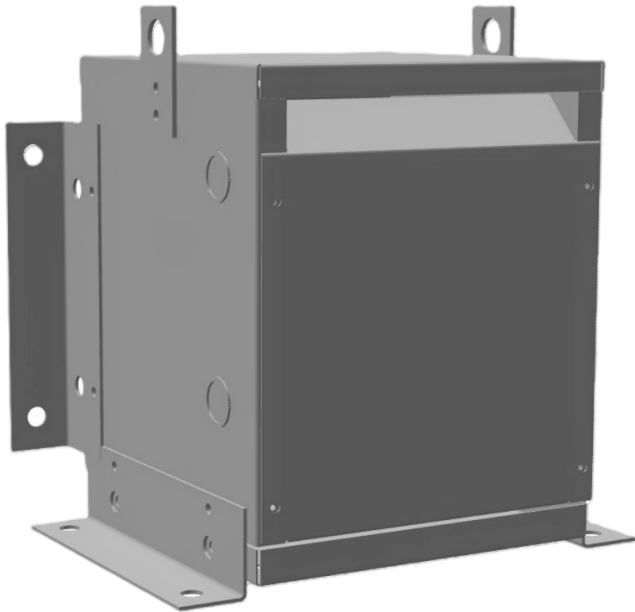

25KVA 440 VOLTS TO 550 VOLTS SINGLE PHASE AUTOTRANSFORMER



\$1,444.30 CAD

Single Phase Autotransformer with a capacity of 25kVA, transforming 440 Volts to 550 Volts

SKU: MC25H2-J2

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

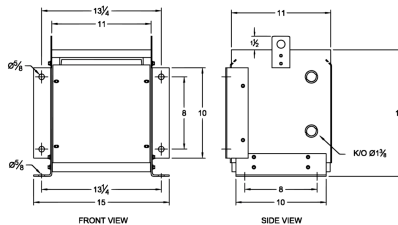

Single Phase Autotransformer with a capacity of 25kVA, transforming 440 Volts to 550 Volts



PRODUCT SPECIFICATIONS

Weight	85.9 lbs
Phases	1
kVA	25
Connection	1PhA-NT-1
Primary Voltage	440
Primary Max Current	32.8A
Primary Markings	X0-X1
Primary Terminals	Terminal Blocks
Secondary Voltage	550
Secondary Max Current	26.2A
Secondary Markings	H0-H1
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	40 dB
Enclosure Type	NEMA 1
Enclosure Size	E1-2
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE
25KVA 440 VOLTS TO 550 VOLTS
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------