


OFFICIAL QUOTE

30KVA 120 VOLTS TO 460 VOLTS THREE PHASE AUTOTRANSFORMER



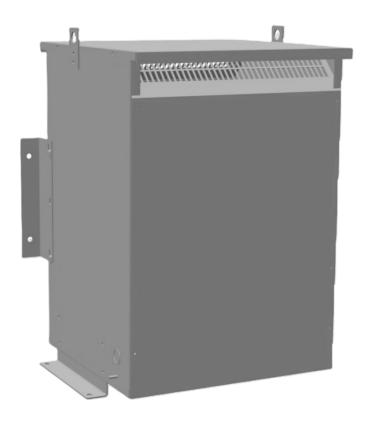

30KVA 120 VOLTS TO 460 VOLTS THREE PHASE AUTOTRANSFORMER


\$3,262.40 CAD


Three Phase Autotransformer with a capacity of 30kVA, transforming 120Y Volts to 460Y Volts

SKU: RA30A-H1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 30kVA, transforming 120Y Volts to 460Y Volts



OFFICIAL QUOTE

30KVA 120 VOLTS TO 460 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 143 lbs |
|----------------------------|--|
| Phases | <u>3</u> |
| kVA | 30 |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 120 |
| Primary Max Current | 144.3A |
| Primary Markings | <u>X1-X2-X3</u> |
| Primary Terminals | <u>300MCM-6</u> |
| Secondary Voltage | 460 |
| Secondary Max Current | 37.7A |
| Secondary Markings | <u>H1-H2-H3</u> |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | N/A |
| Conductor Material | <u>Aluminum</u> |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>2.5 - 4.5%</u> |
| Sound (db) | 45 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-6</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

30KVA 120 VOLTS TO 460 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|