


OFFICIAL QUOTE

30KVA 416 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



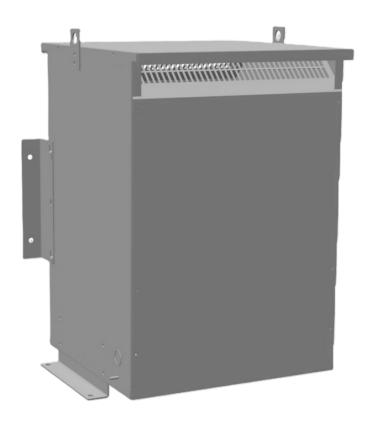

30KVA 416 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER


\$3,370.00 CAD

Three Phase Autotransformer with a capacity of 30kVA, transforming 416Y Volts to 120Y Volts

SKU: RC30G-A

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 30kVA, transforming 416Y Volts to 120Y Volts



OFFICIAL QUOTE



30KVA 416 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	183 lbs
Phases	<u>3</u>
kVA	30
Connection	3PhA-NT-1
Primary Voltage	416
Primary Max Current	41.6A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	120
Secondary Max Current	144.3A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 - 4.5%
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

30KVA 416 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------