


OFFICIAL QUOTE

30KVA 416 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



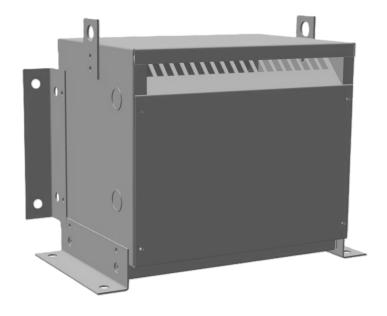

30KVA 416 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,822.40 CAD


Three Phase Autotransformer with a capacity of 30kVA, transforming 416Y Volts to 347Y Volts

SKU: RC30G-E

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 30kVA, transforming 416Y Volts to 347Y Volts



OFFICIAL QUOTE



30KVA 416 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	34 lbs
Phases	<u>3</u>
kVA	30
Connection	<u>3PhA-NT-1</u>
Primary Voltage	416
Primary Max Current	41.6A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	347
Secondary Max Current	<u>49.9A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 - 1.5%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

30KVA 416 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------