


#### **OFFICIAL QUOTE**

### 30KVA 460 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



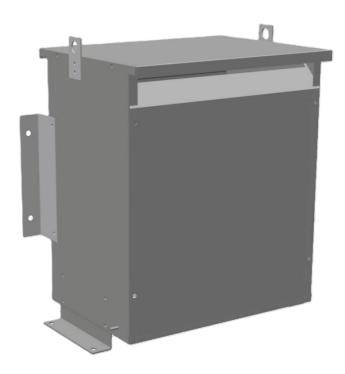

### 30KVA 460 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER

\$2,666.70 CAD

Three Phase Autotransformer with a capacity of 30kVA, transforming 460Y Volts to 208Y Volts

SKU: RC30H1-B

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 30kVA, transforming 460Y Volts to 208Y Volts



### **OFFICIAL QUOTE**



## 30KVA 460 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER

### **PRODUCT SPECIFICATIONS**

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 135 lbs  |
| Phases                     | <u>3</u>   |
| kVA                        | 30   |
| Connection                 | 3PhA-NT-1  |
| Primary Voltage            | 460  |
| Primary Max Current        | 37.7A  |
| Primary Markings           | <u>H1-H2-H3</u>  |
| Primary Terminals          | #2-14 AWG  |
| Secondary Voltage          | 208  |
| Secondary Max Current      | 83.3A  |
| Secondary Markings         | <u>X1-X2-X3</u>  |
| Secondary Terminals        | #2/0-6 AWG   |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 1.5 - 3.5%   |
| Sound (db)                 | <u>45</u>  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | <u>E3R-5</u>   |
| Finish/Colour              | Polyester Powder Coat – ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



### **OFFICIAL QUOTE**

# 30KVA 460 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|