




OFFICIAL QUOTE

30KVA 575 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER

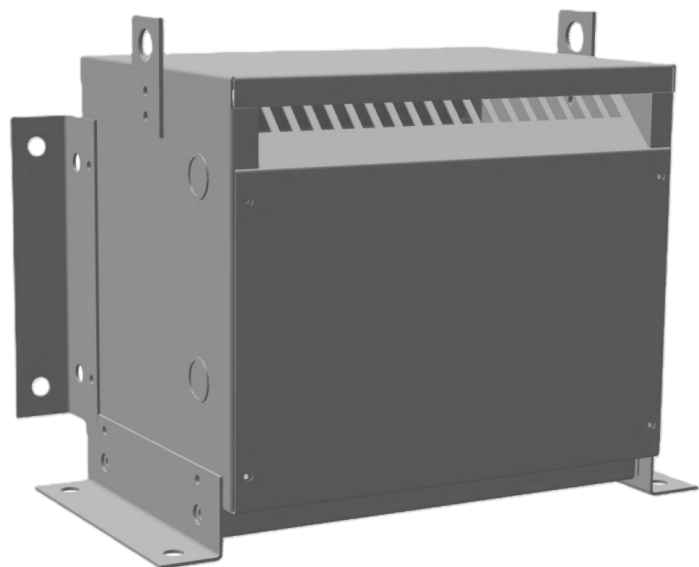

30KVA 575 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



\$2,527.80 CAD

Three Phase Autotransformer with a capacity of 30kVA, transforming 575Y Volts to 416Y Volts

SKU: RC30J1-G

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

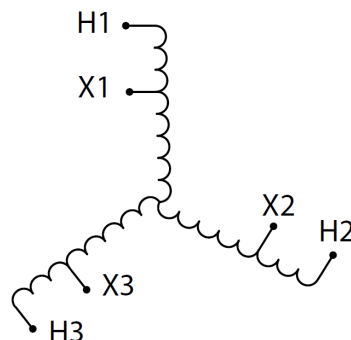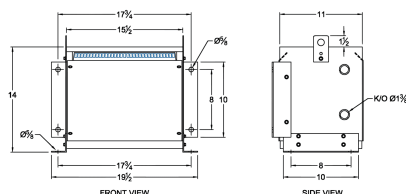

Three Phase Autotransformer with a capacity of 30kVA, transforming 575Y Volts to 416Y Volts



OFFICIAL QUOTE

30KVA 575 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	61 lbs
Phases	3
kVA	30
Connection	3PhA-NT-1
Primary Voltage	575
Primary Max Current	30.1A
Primary Markings	H1-H2-H3
Primary Terminals	Terminal Blocks
Secondary Voltage	416
Secondary Max Current	41.6A
Secondary Markings	X1-X2-X3
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-3
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**30KVA 575 VOLTS TO 416 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer	Canada/RPM
-----------------------------	----------------------------