


OFFICIAL QUOTE

45KVA 277 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



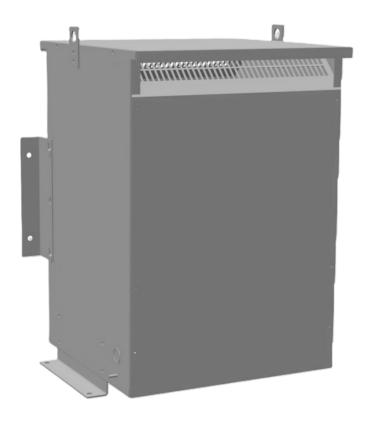

45KVA 277 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER

\$3,436.50 CAD


Three Phase Autotransformer with a capacity of 45kVA, transforming 277Y Volts to 575Y Volts

SKU: RA45D-J1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 45kVA, transforming 277Y Volts to 575Y Volts



OFFICIAL QUOTE



45KVA 277 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 151 lbs |
| Phases | <u>3</u> |
| kVA | <u>45</u> |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 120/240 |
| Primary Max Current | 93.8A |
| Primary Markings | <u>X1-X2-X3</u> |
| Primary Terminals | #2/0-6 AWG |
| Secondary Voltage | <u>575</u> |
| Secondary Max Current | 45.2A |
| Secondary Markings | <u>H1-H2-H3</u> |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 1.5 - 3.5% |
| Sound (db) | <u>45</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-6</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

45KVA 277 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|