


OFFICIAL QUOTE

45KVA 380 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



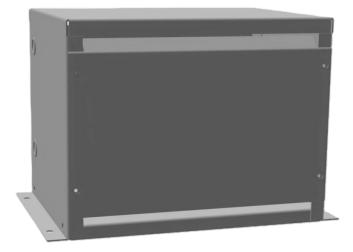

45KVA 380 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER

\$1,571.50 CAD

Three Phase Autotransformer with a capacity of 45kVA, transforming 380Y Volts to 415Y Volts

SKU: RC45F-G2 Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 45kVA, transforming 380Y Volts to 415Y Volts



OFFICIAL QUOTE

45KVA 380 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 25 lbs |
|----------------------------|---|
| Phases | <u>3</u> |
| kVA | <u>45</u> |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | <u>380</u> |
| Primary Max Current | <u>68.4A</u> |
| Primary Markings | <u>X1-X2-X3</u> |
| Primary Terminals | <u>#2-14 AWG</u> |
| Secondary Voltage | <u>415</u> |
| Secondary Max Current | <u>62.6A</u> |
| Secondary Markings | <u>H1-H2-H3</u> |
| Secondary Terminals | <u>#2-14 AWG</u> |
| Primary Taps | N/A |
| Conductor Material | <u>Copper</u> |
| Insulation Class | <u>220°C (Class H)</u> |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | <u>N/A</u> |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | <u>40</u> |
| Enclosure Type | NEMA 1 |
| Enclosure Size | <u>E1-1</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | <u>CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015</u> <u>Registered</u> |



OFFICIAL QUOTE

45KVA 380 VOLTS TO 415 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM