


OFFICIAL QUOTE

45KVA 575 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



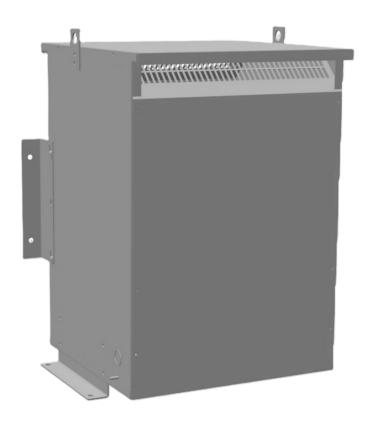

45KVA 575 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER


\$4,246.00 CAD

Three Phase Autotransformer with a capacity of 45kVA, transforming 575Y Volts to 200Y Volts

SKU: RC45J1-B1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 45kVA, transforming 575Y Volts to 200Y Volts



OFFICIAL QUOTE



45KVA 575 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	218 lbs
Phases	<u>3</u>
kVA	<u>45</u>
Connection	3PhA-NT-1
Primary Voltage	<u>575</u>
Primary Max Current	45.2A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	200
Secondary Max Current	<u>129.9A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE 45KVA 575 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------