



**45KVA 600 VOLTS TO 400 VOLTS  
THREE PHASE AUTOTRANSFORMER**



# 45KVA 600 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER


**\$2,770.90 CAD**

Three Phase Autotransformer with a capacity of 45kVA, transforming 600Y Volts to 400Y Volts

**SKU:** RA45J-G1

**Categories:** [Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

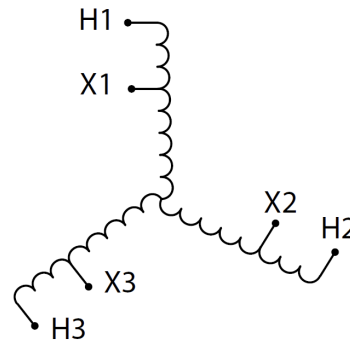

Three Phase Autotransformer with a capacity of 45kVA, transforming 600Y Volts to 400Y Volts



## PRODUCT SPECIFICATIONS

Weight	91 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">45</a>
Connection	<a href="#">3PhA-NT-1</a>
Primary Voltage	<a href="#">600</a>
Primary Max Current	<a href="#">43.3A</a>
Primary Markings	<a href="#">H1-H2-H3</a>
Primary Terminals	<a href="#">#2-14 AWG</a>
Secondary Voltage	<a href="#">400</a>
Secondary Max Current	<a href="#">65A</a>
Secondary Markings	<a href="#">X1-X2-X3</a>
Secondary Terminals	<a href="#">#2-14 AWG</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Aluminum</a>
Insulation Class	<a href="#">220°C (Class H)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">1.0 – 3.0%</a>
Sound (db)	<a href="#">45</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure Size	<a href="#">E3R-5</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

45KVA 600 VOLTS TO 400 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<a href="#">Canada/RPM</a>
----------------------	----------------------------