



OFFICIAL QUOTE

5KVA 277 VOLTS TO 416 VOLTS
SINGLE PHASE AUTOTRANSFORMER



5KVA 277 VOLTS TO 416
VOLTS SINGLE PHASE
AUTOTRANSFORMER


\$837.10 CAD

Single Phase Autotransformer with a capacity of 5kVA, transforming 277 Volts to 416 Volts

SKU: MC5D-G

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

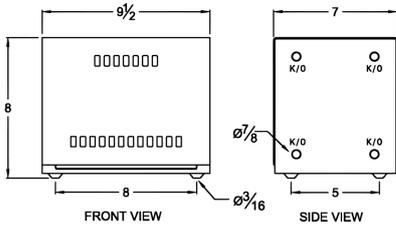

Single Phase Autotransformer with a capacity of 5kVA, transforming 277 Volts to 416 Volts



OFFICIAL QUOTE

5KVA 277 VOLTS TO 416 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	59.1 lbs
Phases	1
kVA	5
Connection	1PhA-NT-1
Primary Voltage	277
Primary Max Current	10.4A
Primary Markings	X0-X1
Primary Terminals	Terminal Blocks
Secondary Voltage	416
Secondary Max Current	6.9A
Secondary Markings	H0-H1
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	40 dB
Enclosure Type	NEMA 1
Enclosure Size	E1-0
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

5KVA 277 VOLTS TO 416 VOLTS
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)