



OFFICIAL QUOTE



5KVA 400 VOLTS TO 416 VOLTS  
SINGLE PHASE AUTOTRANSFORMER



5KVA 400 VOLTS TO 416  
VOLTS SINGLE PHASE  
AUTOTRANSFORMER



**\$583.00 CAD**

Single Phase Autotransformer with a capacity of 5kVA, transforming 400 Volts to 416 Volts

SKU: MC5G1-G

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

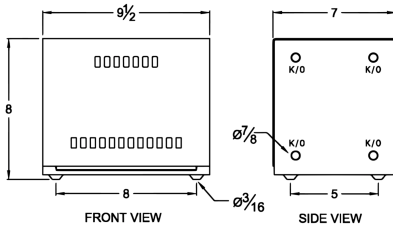

Single Phase Autotransformer with a capacity of 5kVA, transforming 400 Volts to 416 Volts



## OFFICIAL QUOTE

### 5KVA 400 VOLTS TO 416 VOLTS SINGLE PHASE AUTOTRANSFORMER



#### PRODUCT SPECIFICATIONS

<b>Weight</b>	48.6 lbs
<b>Phases</b>	<a href="#">1</a>
<b>kVA</b>	<a href="#">5</a>
<b>Connection</b>	<a href="#">1PhA-NT-1</a>
<b>Primary Voltage</b>	<a href="#">400</a>
<b>Primary Max Current</b>	<a href="#">7.2A</a>
<b>Primary Markings</b>	<a href="#">X0-X1</a>
<b>Primary Terminals</b>	<a href="#">Terminal Blocks</a>
<b>Secondary Voltage</b>	<a href="#">416</a>
<b>Secondary Max Current</b>	<a href="#">6.9A</a>
<b>Secondary Markings</b>	<a href="#">H0-H1</a>
<b>Secondary Terminals</b>	<a href="#">Terminal Blocks</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Insulation Class</b>	<a href="#">180°C (Class F)</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">0.5 – 1.5%</a>
<b>Sound (db)</b>	<a href="#">40 dB</a>
<b>Enclosure Type</b>	<a href="#">NEMA 1</a>
<b>Enclosure Size</b>	<a href="#">E1-0</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

5KVA 400 VOLTS TO 416 VOLTS  
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)