


#### **OFFICIAL QUOTE**

## 5KVA 575 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER



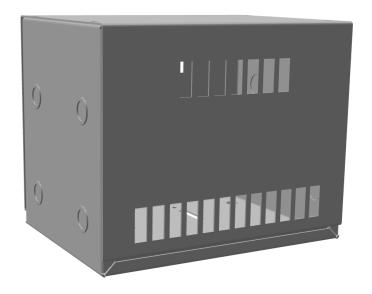

# 5KVA 575 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$751.80 CAD

Single Phase Autotransformer with a capacity of 5kVA, transforming 575 Volts to 440 Volts

SKU: MC5J1-H2

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Autotransformer with a capacity of 5kVA, transforming 575 Volts to 440 Volts



## **OFFICIAL QUOTE**



# 5KVA 575 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 55.6 lbs   |
| Phases                     | 1  |
| kVA                        | <u>5</u>   |
| Connection                 | <u>1PhA-NT-1</u>   |
| Primary Voltage            | <u>575</u>   |
| Primary Max Current        | <u>5A</u>  |
| Primary Markings           | <u>H0-H1</u>   |
| Primary Terminals          | Terminal Blocks  |
| Secondary Voltage          | 440  |
| Secondary Max Current      | 6.6A   |
| Secondary Markings         | <u>X0-X1</u>   |
| Secondary Terminals        | Terminal Blocks  |
| Primary Taps               | N/A  |
| Conductor Material         | <u>Copper</u>  |
| Insulation Class           | 180°C (Class F)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 1.0 - 3.0%   |
| Sound (db)                 | 40 dB  |
| Enclosure Type             | NEMA 1   |
| Enclosure Size             | <u>E1-0</u>  |
| Finish/Colour              | Polyester Powder Coat – ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



## **OFFICIAL QUOTE**

# 5KVA 575 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|