



OFFICIAL QUOTE



600KVA 575 VOLTS TO 380 VOLTS  
THREE PHASE AUTOTRANSFORMER



600KVA 575 VOLTS TO 380  
VOLTS THREE PHASE  
AUTOTRANSFORMER



**\$20,975.70 CAD**

Three Phase Autotransformer with a capacity of 600kVA, transforming 575Y Volts to 380Y Volts

SKU: RC600J1-F

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

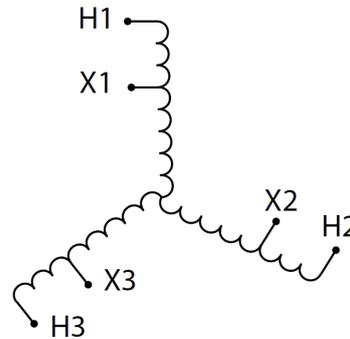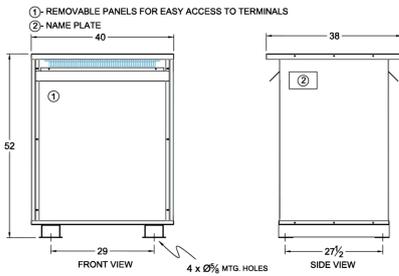

Three Phase Autotransformer with a capacity of 600kVA, transforming 575Y Volts to 380Y Volts



## OFFICIAL QUOTE

### 600KVA 575 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER



#### PRODUCT SPECIFICATIONS

<b>Weight</b>	1843 lbs
<b>Phases</b>	<a href="#">3</a>
<b>kVA</b>	<a href="#">600</a>
<b>Connection</b>	<a href="#">3PhA-NT-1</a>
<b>Primary Voltage</b>	<a href="#">575</a>
<b>Primary Max Current</b>	<a href="#">602.5A</a>
<b>Primary Markings</b>	<a href="#">H1-H2-H3</a>
<b>Primary Terminals</b>	<a href="#">Pads</a>
<b>Secondary Voltage</b>	<a href="#">380</a>
<b>Secondary Max Current</b>	<a href="#">911.6A</a>
<b>Secondary Markings</b>	<a href="#">X1-X2-X3</a>
<b>Secondary Terminals</b>	<a href="#">Pads</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Insulation Class</b>	<a href="#">220°C (Class H)</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">1.0 – 3.0%</a>
<b>Sound (db)</b>	<a href="#">60</a>
<b>Enclosure Type</b>	<a href="#">NEMA 3R Indoor</a>
<b>Enclosure Size</b>	<a href="#">E3R-9</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

600KVA 575 VOLTS TO 380 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)