




OFFICIAL QUOTE

750KVA 277 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER

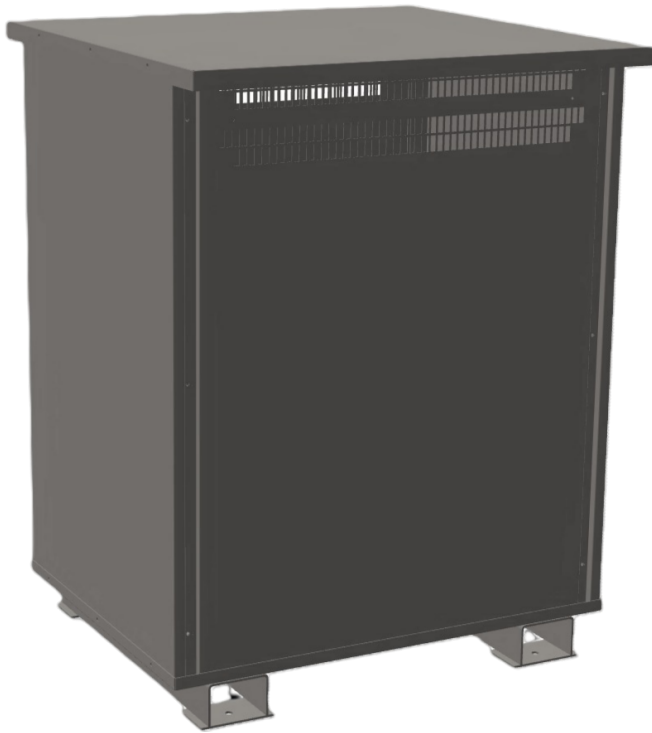

750KVA 277 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



\$21,227.30 CAD

Three Phase Autotransformer with a capacity of 750kVA, transforming 277Y Volts to 200Y Volts

SKU: RC750D-B1

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

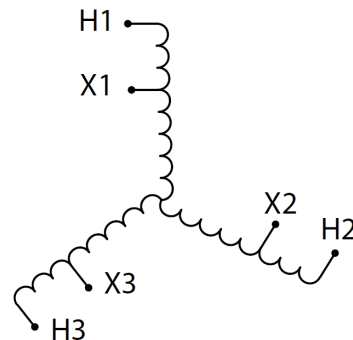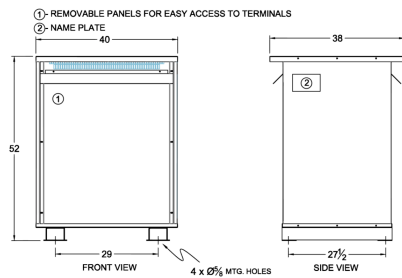

Three Phase Autotransformer with a capacity of 750kVA, transforming 277Y Volts to 200Y Volts



OFFICIAL QUOTE

750KVA 277 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	1895 lbs
Phases	3
kVA	750
Connection	3PhA-NT-1
Primary Voltage	277
Primary Max Current	1563.2A
Primary Markings	H1-H2-H3
Primary Terminals	Pads
Secondary Voltage	200
Secondary Max Current	2165.1A
Secondary Markings	X1-X2-X3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-9
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**750KVA 277 VOLTS TO 200 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer	Canada/RPM
-----------------------------	----------------------------